

SPECIAL FEATURE

- Space-Saving Design : 58L*28W*36.5H(mm)
- Operating Load Voltage : 40~440VAC 50/60HZ
- Input Voltage : 4~32VDC
- Control System : zero Voltage Switching Control
- Min Load Current : 0.6A(under)
- Output Display : Red LED Lamp turns.
- Operating Temp : -20°C~+80°C
- Isolation Strength : Over 500MΩ/500VDC
- Housing Material : PBT
- Weight : Appr.48g

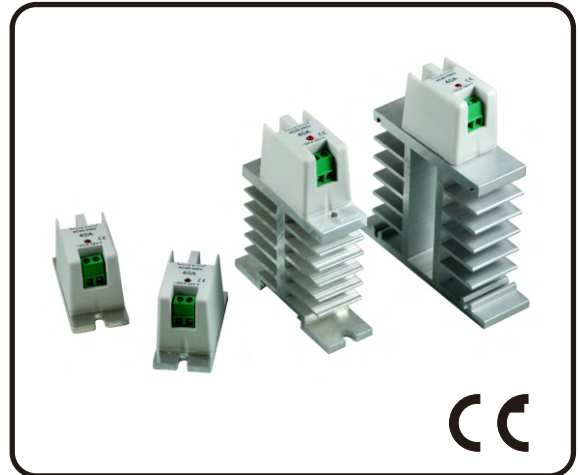


FIG. 1
Maximum power dissipation versus RMS on-state current (full cycle)


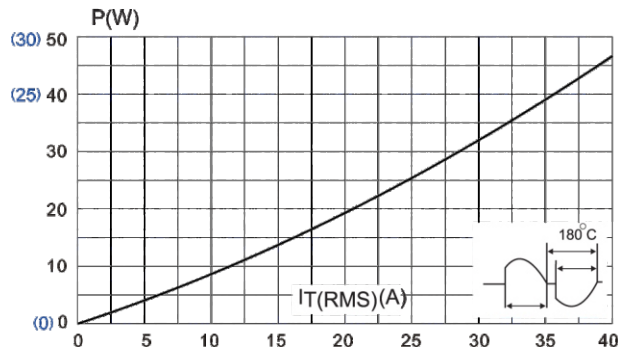



FIG. 2
RMS on-state current versus case temperature (full cycle)

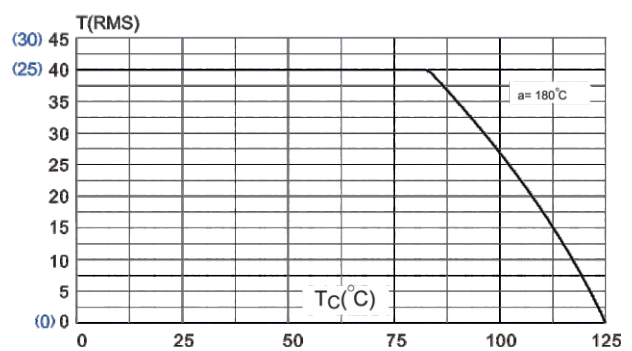

Order Code Table

Item	Code	Specification
series	SSR3-	
Power Supply	4	40~440VAC ± 10% 50/60HZ
Current Capacity	40	40A
Heat Sink (option)	L	19A UNDER 68HX83W*28L(mm)Appr.115g
	H	20A UNDER 80HX100W*25L(mm)Appr.115g
Fan Cooling (option)	O	non
	F	AC220V/30A OVER 80HX80W(mm)

Dimension :

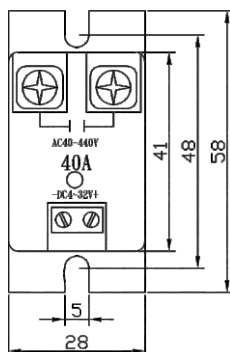

Heat Sink :

